




Din Rail Terminal Blocks

**DEGSON**

Device Connection Technology

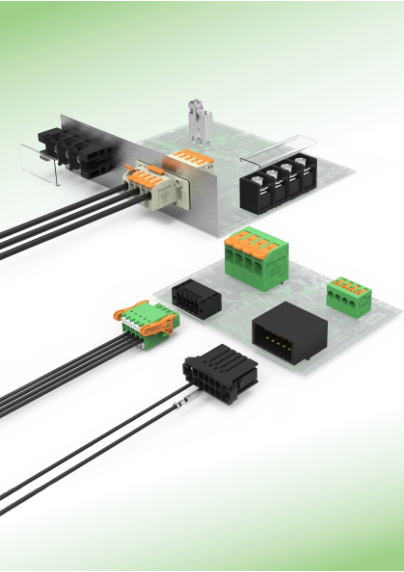

DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Circular Connectors



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Heavy Duty Connector



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

High Voltage & EV Charging System



NINGBO DEGSON EMOBILITY CONNECTIVITY CO.,LTD.
ISO9001 ISO14001 IATF16949

**DEGSON**

Interface Electronics




DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

**DEGSON**

Automation



DEGSON PTE. LTD.
ISO9001 ISO14001 ISO45001 ISO80079-34 ISO/TS22163 IATF16949

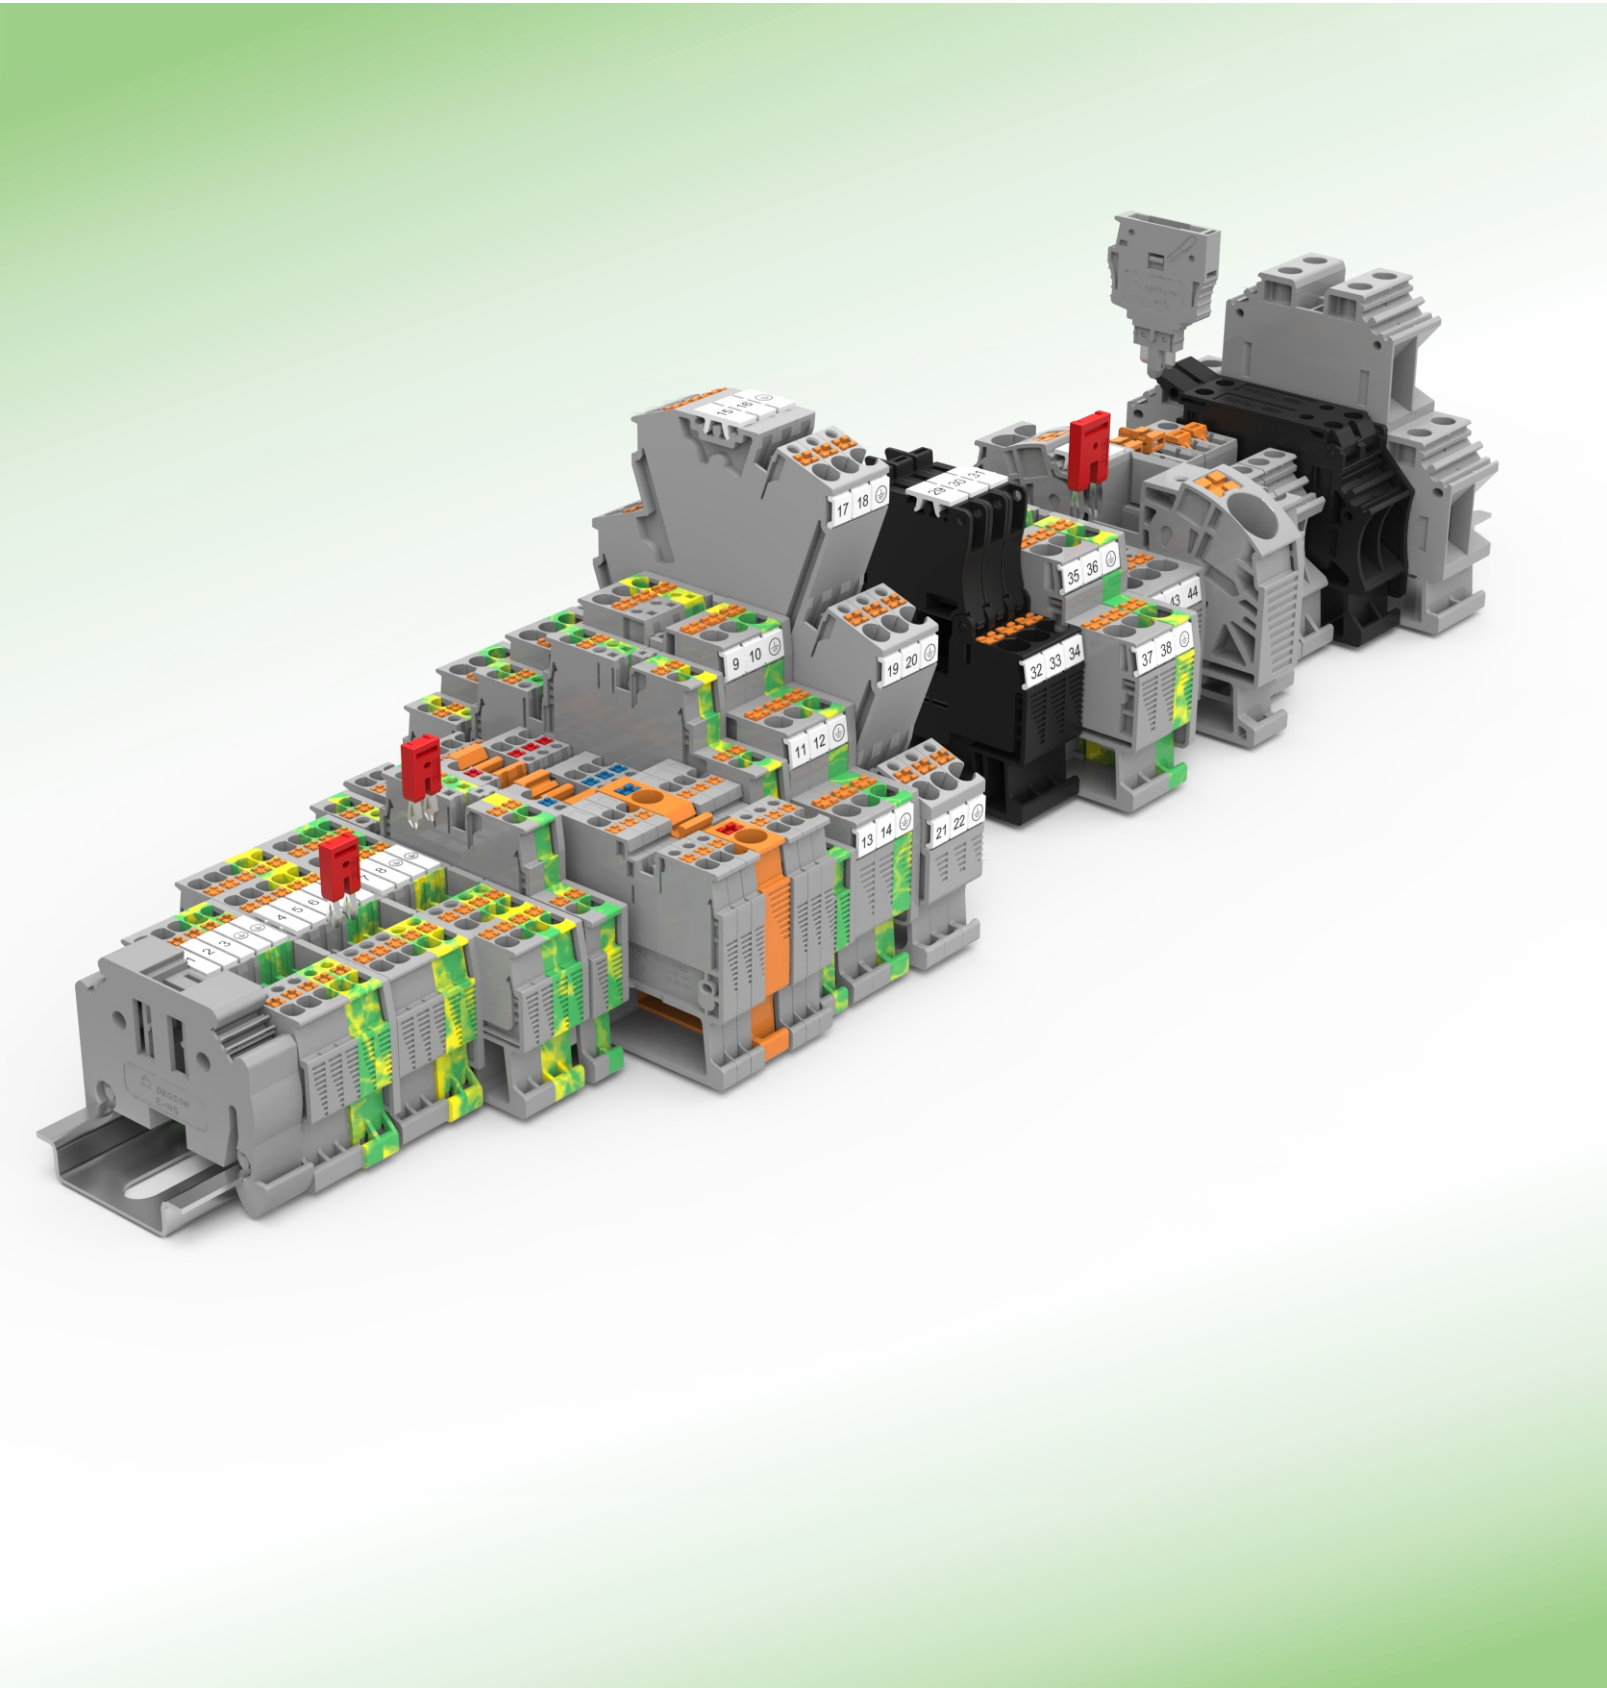

ELPRO.RU

DRE 24-E01

BRIEF INTRODUCTION

01 Founded in 1990,DEGSON is well known as a comprehensive industrial solution provider,with UL-CTDP, VDE-TDAP and CNAS approved laboratory.DEGSON has passed ISO9001, ISO14001, ISO45001, ISO80079-34, ISO/TS22163 and IATF16949 Management System,and is a national high-tech enterprise.

02
DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.

03
DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, E-bike industrial elevator, lighting, security, machinery, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

Based on the core values of “Clients First, Win-win Strategy, Responsibility Integrity, Excellence Pursuit”, DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.



DEGSON Global Production Base and R&D Center



High-tech zone site



Vietnam site



Nanjing R&D Center




Luoyang R&D Center

DEGSON products are very popular more than 100 countries and areas.



UL-CTDP (USA), VDE-TDAP (Germany) and CNAS labs

Strategic cooperation with UL and VDE

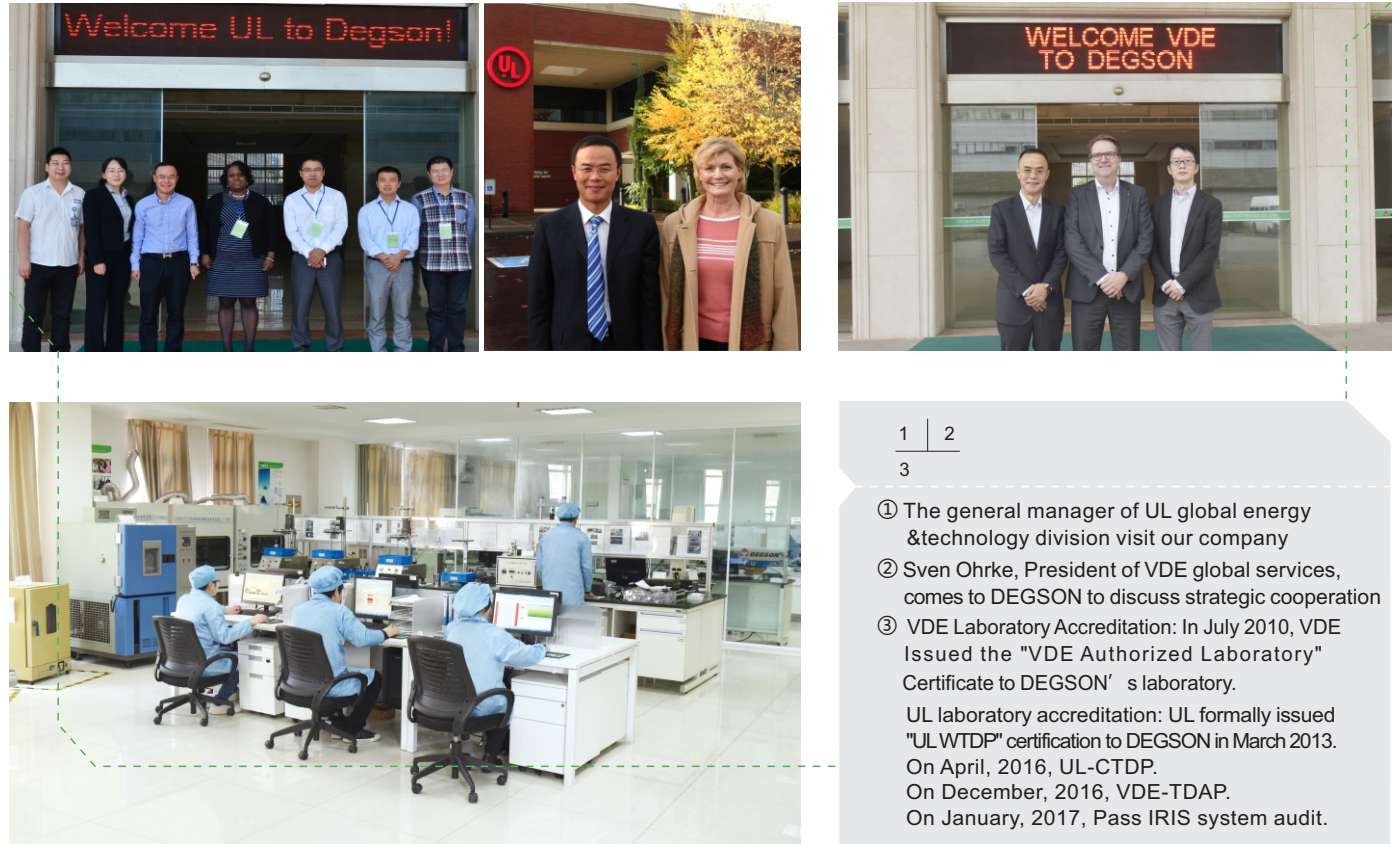

CONTENTS

Din rail terminal blocks series

DS Push-in series.....	01-06
WS Spring-cage series.....	07-11
STB Spring-cage series.....	12-13
DC Steel screw series.....	14-17
PC Brass screw series	18-21
DHV High-voltage screw series.....	22-23
BS Bolt connection series	24-25


Accessories & marking system

Marking System	26-28
Terminal blocks marker	28-29




DS-Push-in Connection Terminal Blocks


- Adopt Push-in connection technology, no tools for wiring, high efficiency and quick connection
- Double channel bridge position, easy to realize potential distribution
- Standardized test hole, convenient and fast circuit test
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end

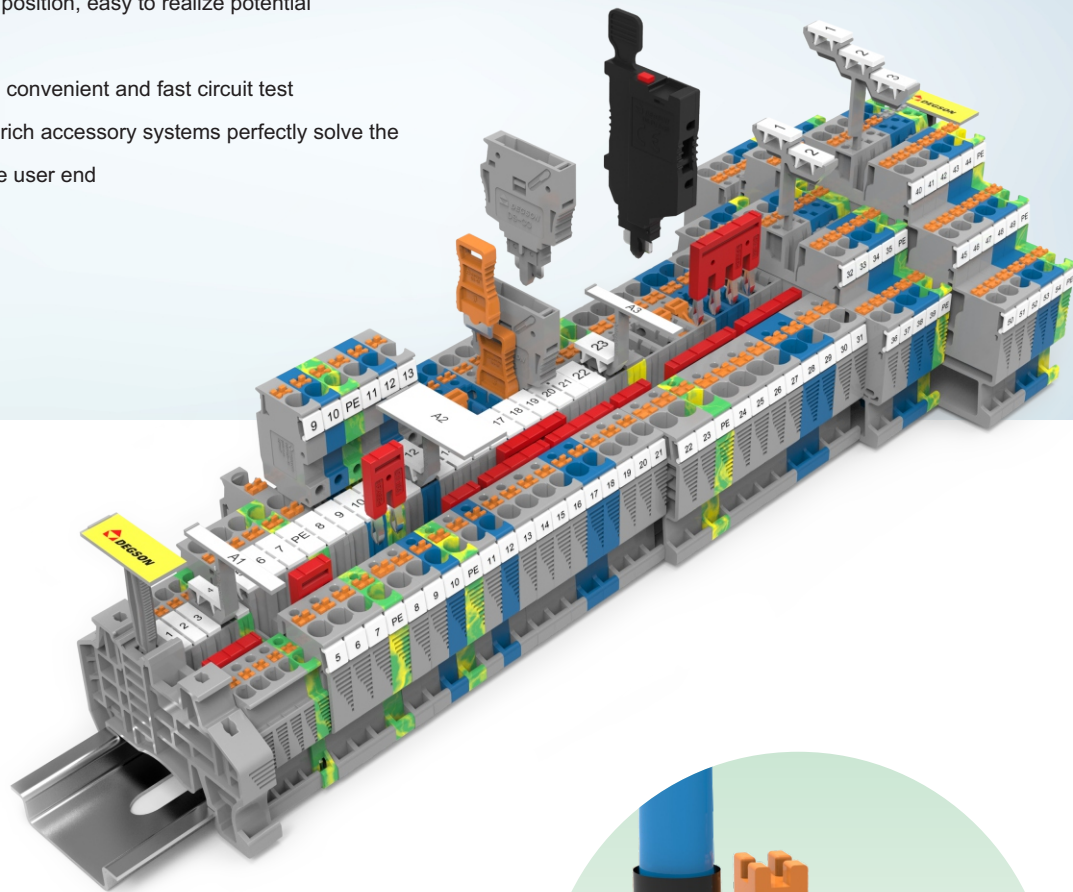

DS push-in connection technology terminal blocks, imported stainless steel spring, unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40°C to 105°C, and all DS series of din rail products are in line with UL94 V0 flame retardant grade. The push-in spring structure design greatly improves the connection efficiency. Solid wire or stranded wire processed by terminals can be inserted directly without tools.

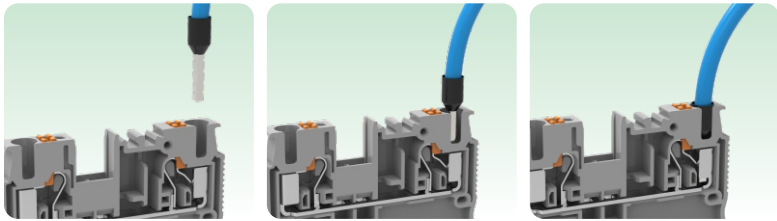


DS1.5 CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/45/1.5mm	DS1.5-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/45/1.5mm	DS1.5-TW CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/54/1.5mm	DS1.5-TW-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/54/1.5mm	DS1.5-QU CE 500V/17.5A 0.14-1.5mm² UL 300V/15A 26-14AWG T/W/End plate 3.5/63.2/1.5mm
DS1.5-QU-PE CE — 0.14-1.5mm² UL — 26-14AWG T/W/End plate 3.5/63.2/1.5mm	DSKK1.5 CE 500V/16A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DSKK1.5-PV CE 500V/16A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DSKK1.5-PE CE — 0.14-1.5mm² UL — 26-16AWG T/W/End plate 3.5/68.2/1.5mm	DS1.5-3L CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm
DS1.5-3L-PV CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-PE CE — 0.14-1.5mm² UL — 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-L/L/PE CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS1.5-3L-L/N/PE CE 500V/15A 0.14-1.5mm² UL 300V/15A 26-16AWG T/W/End plate 3.5/102/1.5mm	DS2.5 CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/48.6/1.5mm
DS2.5-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/48.6/1.5mm	DS2.5-TW CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/60.5/1.5mm	DS2.5-TW-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/60.5/1.5mm	DS2.5-QU CE 800V/24A 0.14-4mm² UL 600V/20A 26-12AWG T/W/End plate 5.2/72.2/1.5mm	DS2.5-QU-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/72.2/1.5mm
DSKK2.5 CE 500V/22A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DSKK2.5-PV CE 500V/22A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DSKK2.5-PE CE — 0.14-4mm² UL — 26-12AWG T/W/End plate 5.2/68.2/1.5mm	DS2.5-3L CE 500V/20A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/102/1.5mm	DS2.5-3L-PV CE 500V/20A 0.14-4mm² UL 300V/20A 26-12AWG T/W/End plate 5.2/102/1.5mm




DS2.5-3L-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/102/1.5mm		




DS2.5-3L-L/L/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		




DS2.5-3L-L/N/PE

CE	500V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/102/1.5mm		




DS2.5-PE/3L

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		




DS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4-TW

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/66.5/1.5mm		




DS4-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/66.5/1.5mm		




DS4-QU

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/77/1.5mm		




DS4-QU-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/77/1.5mm		




DSKK 4

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		




DSKK4-PV

CE	500V/32A	0.2-6mm ²
UL	300V/28A	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		



DSKK4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/83.5/1.5mm		




DS6

CE	1000V/41A	0.5-10mm ²
UL	600V/50A	20-8AWG
T/W/End plate 8.2/58/1.5mm		




DS6-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/58/1.5mm		




DS6-TW

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate 8.2/74.2/1.5mm		




DS6-TW-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/74.2/1.5mm		




DS6-QU

CE	1000V/41A	0.5-10mm ²
UL	600V/40A	20-8AWG
T/W/End plate 8.2/90.4/1.5mm		



DS6-QU-PE

CE	—	0.5-10mm ²
UL	—	20-8AWG
T/W/End plate 8.2/90.4/1.5mm		




DS10

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate 10.2/67.7/1.5mm		




DS10-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate 10.2/67.7/1.5mm		




DS10-TW

CE	1000V/57A	0.5-16mm ²
UL	600V/60A	20-6AWG
T/W/End plate 10.2/88.9/1.5mm		




DS10-TW-PE

CE	—	0.5-16mm ²
UL	—	20-6AWG
T/W/End plate 10.2/88.9/1.5mm		




DS16

CE	1000V/76A	0.5-25mm ²
UL	600V/85A	20-4AWG
T/W/End plate 12.2/75.4/1.5mm		




DS16-PE

CE	—	0.5-25mm ²
UL	—	20-4AWG
T/W/End plate 12.2/75.4/1.5mm		




DS16-TW

CE	1000V/76A	0.5-25mm ²
UL	600V/85A	20-4AWG
T/W/End plate 12.2/100.4/1.5mm		



DS16-TW-PE

CE	—	0.5-25mm ²
UL	—	20-4AWG
T/W/End plate 12.2/100.4/1.5mm		



DS4-HE

CE	400V/6.3A	0.2-6mm ²
UL	300V/6.3A	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		



DS4-HE-LD24

CE	24V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4-HE-LD60

CE	60V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4-HE-LD250

CE	250V/6.3A	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS2.5-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/62/1.5mm		




DS2.5-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/62/1.5mm		




DS2.5-TW-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.7/1.5mm		



DS2.5-TW-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.7/1.5mm		




DS2.5-QU-MT

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/84/1.5mm		




DS2.5-QU-TG

CE	400V/20A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/84/1.5mm		




DS4-MT

CE	500V/20A	0.2-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4-TG

CE	500V/20A	0.2-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS6-MT

CE	500V/20A	0.5-10mm ²
UL	300V/20A	20-8AWG
T/W/End plate 8.2/74.2/-mm		




DS6-TG

CE	500V/20A	0.5-10mm ²
UL	300V/20A	20-8AWG
T/W/End plate 8.2/74.2/-mm		




DS2.5/1P

CE	500V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		




DS2.5/1P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		




DS2.5/2P

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		



DS2.5/2P-PE


CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/48.6/1.5mm		






DS2.5-QU/4P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/89.6/1.5mm		




DSKK2.5/2P

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		




DSKK2.5/2P-PV

CE	500V/22A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		




DSKK2.5/2P-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/73.5/1.5mm		




DS4/1P

CE	800V/32A	0.2-6mm ²
UL	600V/28A	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DS4/1P-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/55.6/1.5mm		




DSIO1.5/3

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/74.4/2.2mm		




DSIO1.5/3-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-16AWG
T/W/End plate 3.5/74.4/2.2mm		




DSIO1.5/4

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/90.9/2.2mm		




DSIO1.5/4-PE

CE	250V/13.5A	0.14-1.5mm ²
UL	300V/15A	26-14AWG
T/W/End plate 3.5/90.9/2.2mm		




DSIO-IN 2.5/3 OG

CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate 7/74.4/2.2mm		




DSIO-IN 2.5/4-PE OG

CE	250V/20A	0.2-4mm ²
UL	300V/10A	26-12AWG
T/W/End plate 7/90.9/2.2mm		




DS2.5-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/48.6/1.5mm		




DS2.5-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/48.6/1.5mm		




DS2.5-TW-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/60.5/1.5mm		




DS2.5-TW-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/60.5/1.5mm		



DS2.5-QU-LD L-R

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/72.2/1.5mm		




DS2.5-QU-LD R-L

CE	800V/1A	0.14-4mm ²
UL	(Reverse breakdown voltage 1.3kV) 26-12AWG	
T/W/End plate 5.2/72.2/1.5mm		




DSV2.5

CE	600V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/50.8/1.5mm		




DSV2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/50.8/1.5mm		




DSKKS2.5

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/82/1.5mm		



DSKKS2.5-PV

CE	500V/24A	0.14-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.2/82/1.5mm		




DSKKS2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/82/1.5mm		




DSKKS4

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/92/1.5mm		




DSKKS4-PV

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/92/1.5mm		



DSKKS4-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 6.2/92/1.5mm		




DSHV2.5-2000

CE	2000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 6.2/57/1.5mm		



DSS2.5-3L-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		




DSS2.5-3L-PV-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		




DSS2.5-3L-PE-01A(H)

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-L/L/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DSS2.5-3L-L/N/PE-01A(H)

CE	800V/20A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/99.4/1.5mm		



DFBXX-3.5

DFBXX-3.5 - DS1.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		



DFBXX-5.2

DFBXX-5.2 - DS2.5 Series		
XX: NO. OF POLE		
2-10POLES, 20POLES		



DFBXX-6.2

DFBXX-6.2 - DS4 Series		
XX: NO. OF POLE		
2-10POLES		



DFBXX-8.2

DFBXX-8.2 - DS6 SERIES		
XX: NO. OF POLE		
2-10POLES		



DFBXX-10.2

DFBXX-10.2 - DS10 SERIES		
XX: NO. OF POLE		
2-10POLES		



DFBXX-12.2

DFBXX-12.2 - DS16 Series		
XX: NO. OF POLE		
2POLES		



DS-CO

DS-CO - DS2.5-TG DS4-TG		
DS6-TG DC4-TG		



DS-DI

DS-DI - DS2.5-TG DS4-TG		
DS6-TG DC4-TG		



DS-FU5

DS-FU5 - DS2.5/DS4/DS6/ DC4-TG		
CE	400V/6.3A	UL 300V/10A



DS-FU5-LD24

DS-FU5-LD24 - DS2.5/DS4/DS6/ DC4-TG		
CE	24V/6.3A	UL —




DSP2.5-H

DSP2.5-H - DS2.5/1P DS2.5/1P-PE DS2.5/2P DS2.5/2P-PE DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		



DSP2.5-C

DSP2.5-C - DS2.5/1P DS2.5/1P-PE DS2.5/2P DS2.5/2P-PE DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		



DSP2.5-L

DSP2.5-L - DS2.5/1P DS2.5/1P-PE DS2.5/2P DS2.5/2P-PE DS2.5-TW/1P DS2.5-TW/1P-PE		
In addition, it can also be adapted to various types of DS2.5 series plug-in terminal blocks		




DSP4-H


DSP4-H - DS4/1P		
DS4/1P-PE		
In addition, it can also be adapted to various types of DS4 series plug-in terminal blocks		





















WS-Spring-cage Connection Terminal Blocks


- Proven Spring-cage connection technology with excellent seismic performance
- The spring compression force is constant, and the connection is stable and reliable.
- Pluggable bridge, high circuit connection efficiency
- Large area identification space, clear wiring

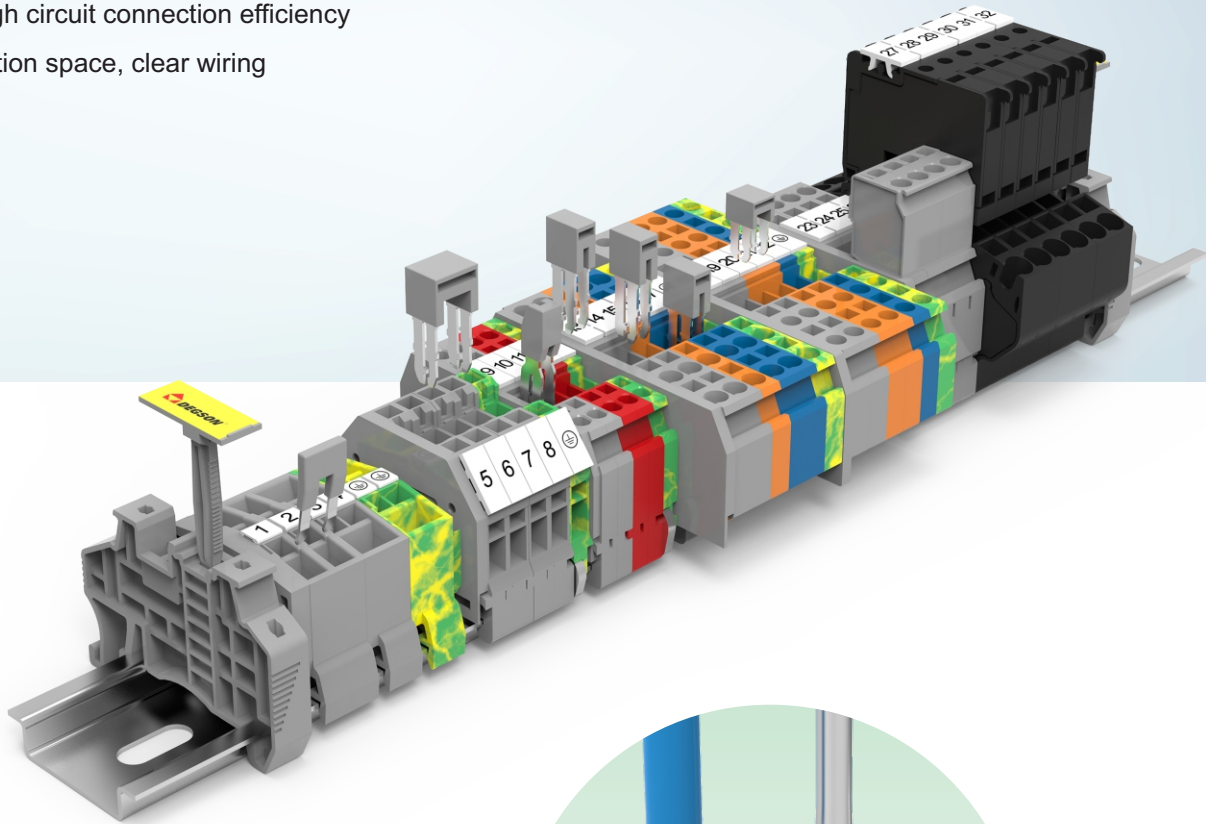

The WS spring-cage connection technology terminal block adopts imported stainless steel spring, and the unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66's plastic parts can meet the working environment of -40°C to 105°C, and all WS series of din rail products are in line with UL94 V0 flame retardant grade. The spring-cage structure design makes the wiring efficiency higher than screw type. People just use a slotted screwdriver to connect solid wire or stranded wire processed by terminals.

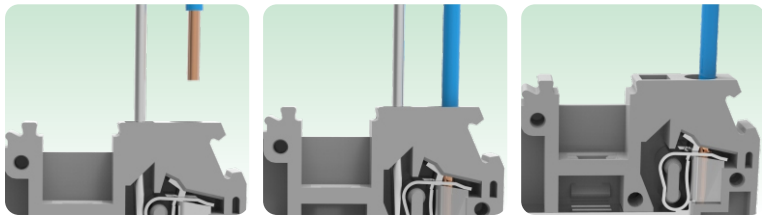


				
WS1.5 CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/51.8/2.5mm	WS1.5-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/51.8/2.5mm	WS1.5-TW CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/62.5/2.5mm	WS1.5-TW-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/62.5/2.5mm	WS1.5-QU CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/73/2.5mm
				
WS1.5-QU-100A(H) CE 800V/18A 0.2-1.5mm² UL 600V/10A 28-16AWG T/W/End plate 4/68/2.5mm	WS1.5-QU-PE CE — 0.2-1.5mm² UL — 28-16AWG T/W/End plate 4/73/2.5mm	WS1.5-DB CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 5/25/2.5mm	WS1.5-DB-11A(H) CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 5/25/2.5mm	WS1.5T-DB CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 8/25/2.5mm
				
WS1.5T-DB-11A(H) CE 800V/17.5A 0.2-1.5mm² UL 300V/10A 28-16AWG T/W/End plate 4/25/2.5mm	WS2.5 CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 4/53/2.5mm	WS2.5-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/53/2.5mm	WS2.5-TW CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 5/64.2/2.5mm	WS2.5-TW-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/64.2/2.5mm
				
WS2.5-QU CE 800V/24A 0.2-2.5mm² UL 600V/15A 28-14AWG T/W/End plate 5/75.5/2.5mm	WS2.5-QU-PE CE — 0.2-2.5mm² UL — 28-14AWG T/W/End plate 5/75.5/2.5mm	WS2.5-DB CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 6/28/2.5mm	WS2.5-DB-11A(H) CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 6/28/2.5mm	WS2.5-DIN15 CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm
				
WS2.5-DIN15-PE CE — 0.2-2.5mm² UL — 28-12AWG T/W/End plate 6/32/4.0mm	WS2.5-DIN35 CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm	WS2.5-MID-CO CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 6/32/4.0mm	WS2.5-END-CO CE 800V/24A 0.2-2.5mm² UL 600V/20A 28-14AWG T/W/End plate 12/32/4.0mm	WS2.5T-DB CE 800V/24A 0.2-2.5mm² UL 300V/15A 28-14AWG T/W/End plate 10/28/2.5mm



WS2.5T-DB-11A(H)

CE	800V/24A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
T/W/End plate 10/28/2.5mm		




WS2.5T-DIN15

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS2.5T-DIN35

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS2.5T-MID-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS2.5T-END-CO

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	28-14AWG
T/W/End plate 10/32/4.0mm		




WS4

CE	800V/32A	0.2-4mm ²
UL	600V/15A	28-12AWG
T/W/End plate 6/60.4/2.5mm		




WS4-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/60.4/2.5mm		



WS4-DB

CE	630V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 7/33.4/2.5mm		




WS4-TW

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/73.5/2.5mm		




WS4-TW-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/73.5/2.5mm		




WS4-QU

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/86.2/2.5mm		



WS4-QU-PE

CE	—	0.2-4mm ²
UL	—	28-12AWG
T/W/End plate 6/86.2/2.5mm		



WS4T-DB

CE	800V/32A	0.2-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 12/33.4/2.5mm		



WS6

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/74.5/2.5mm		




WS6-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/74.5/2.5mm		



WS6-TW

CE	800V/41A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/93/2.5mm		




WS6-TW-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/93/2.5mm		



WS10

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/77.5/2.5mm		



WS10-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/77.5/2.5mm		




WS10-TW

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/97.5/2.5mm		




WS10-TW-PE

CE	—	0.2-10mm ²
UL	—	24-8AWG
T/W/End plate 10/97.5/2.5mm		



WS16

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/94.5/2.5mm		




WS16-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/94.5/2.5mm		




WS16-TW

CE	800V/76A	0.2-16mm ²
UL	600V/66A	24-6AWG
T/W/End plate 12/104.5/2.5mm		




WS16-TW-PE

CE	—	0.2-16mm ²
UL	—	24-6AWG
T/W/End plate 12/104.5/2.5mm		




WS35

CE	1000V/125A	0.5-35mm ²
UL	600V/115A	24-2AWG
T/W/End plate 16/99.9/-mm		



WS35-PE

CE	—	0.5-35mm ²
UL	—	24-2AWG
T/W/End plate 16/99.9/-mm		



WS2.5-TW-TA

CE	800V/24A	0.2-2.5mm ²
UL	600V/15A	28-14AWG
T/W/End plate 5/50.5/2.5mm		



WS2.5-TW-TA-PE

CE	—	0.2-2.5mm ²
UL	—	28-14AWG
T/W/End plate 5/50.5/2.5mm		



WSF4-TA

CE	400V/6.3A	0.5-4mm ²
UL	300V/6.3A	28-10AWG
T/W/End plate 6/60/-mm		



WSF4-TA-10A(H)

CE	250V/10A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		



WSF4-TA-LD24

CE	24V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		




WSF4-TA-LD60

CE	60V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		




WSF4-TA-LD250

CE	250V/6.3A	0.2-4mm ²
UL	—	28-10AWG
T/W/End plate 6/60/-mm		




WS2.5-QU-LD-L-R

CE	250V/0.5A	0.2-2.5mm ²
UL	(Reverse breakdown voltage 1KV)	28-14AWG
T/W/End plate 5/75.5/2.5mm		



WS2.5-QU-LD-R-L

CE	250V/0.5A	0.2-2.5mm ²
UL	(Reverse breakdown voltage 1KV)	28-14AWG
T/W/End plate 5/75.5/2.5mm		



WS1.5-SD

CE	800V/18A	0.2-1.5mm ²
UL	600V/10A	28-16AWG
T/W/End plate 4/42.5/2.3mm		




WS2.5-SD

CE	800V/24A	0.2-2.5mm ²
UL	600V/15A	28-12AWG
T/W/End plate 5/42.5/2.5mm		




WS2.5-SD-PE

CE	—	0.2-2.5mm ²
UL	—	28-12AWG
T/W/End plate 5/42.5/2.5mm		



WS4-SD

CE	800V/32A	0.2-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 6/41.8/2.5mm		




WS6-SD

CE	800V/32A	0.2-6mm ²
UL	600V/30A	24-10AWG
T/W/End plate 8/46.5/2.5mm		




WS6-SD-PE

CE	—	0.2-6mm ²
UL	—	24-10AWG
T/W/End plate 8/46.5/2.5mm		




WS10-SD

CE	800V/57A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 10/52/2.5mm		




WS10-SD-PE



WS2.5P

CE	500V/22A	0.2-2.5mm ²
UL	300V/15A	28-14AWG
T/W/End plate	5/53/2.5mm	



WS2.5P-PE

CE	—	0.2-2.5mm ²
UL	—	28-14AWG
T/W/End plate	5/53/2.5mm	



WFA1.5

WS1.5 series bridge -2-bit stackable Bridge




WFA2.5

WS 2.5 series bridge -2-bit stackable Bridge




WFA4

Ws4 series bridge -2-bit stackable Bridge




WFA6

Ws6 series bridge -2-bit stackable Bridge




WFA10

Ws10 series bridge -2-bit stackable Bridge



WFA16

Ws16 series bridge -2-bit stackable Bridge




WFB1.5

WS1.5 series jumper - Bay 1-bit jumper




WFB2.5

WS2.5 series jumper - Bay 1-bit jumper




WFB4

Ws4 series jumper - Bay 1-bit jumper




WFB6

Ws6 series jumper - Bay 1-bit jumper



WFB10

Ws10 series jumper - Bay 1-bit jumper




WFB16

Ws16 series jumper - Bay 1-bit jumper



WFC2.5-2, WFC2.5-3, WFC2.5-4
WFC2.5-5, WFC2.5-6, WFC2.5-7
WFC2.5-8

WS2.5 series jumper - Interval 1-7 position jumper





WFE-2.5


WS2.5 series side plug bridge
-WS2.5-DIN15, WS2.5-DIN35,
-WS2.5-MID-CO, WS2.5-MID-CO,
-WS2.5-DB, WS2.5-DB-11A(H)


STB Spring-cage Terminal Blocks

- Proven spring-cage connection technology with excellent seismic performance.
- With large wiring capacity, it can be connected to rated conductors with or without ferrules.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Clear front identification and easy identification of the marked area.

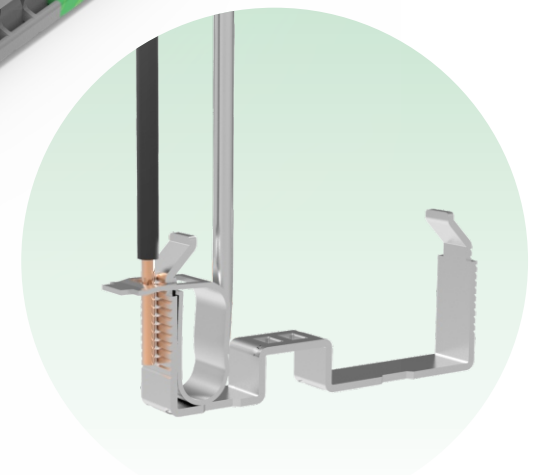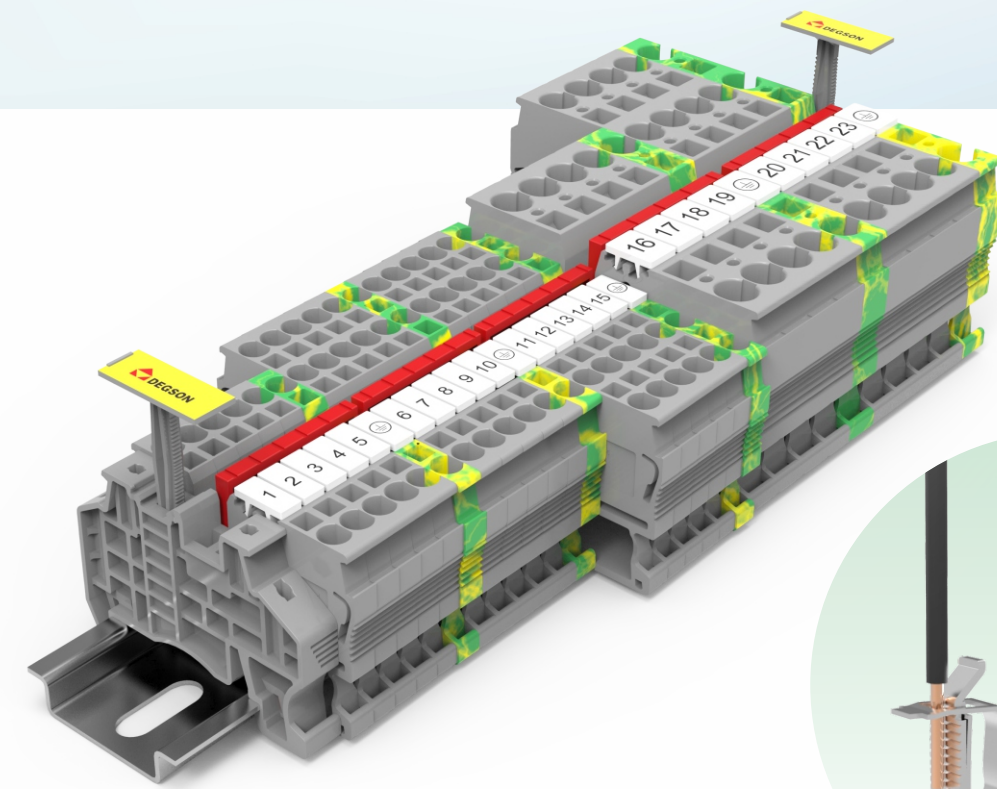


STB spring-cage terminal blocks are made of high-quality alloy structure, providing reliable and durable connection products. It is possible to connect wires that have not been pretreated. The wiring capacity is large, and the wires with or without a cold pressure head of the rated wire diameter can be accessed. At the same time, the proven pull-back connection technology has excellent seismic performance and excellent performance in high vibration situations such as railways, ships, and equipment manufacturing. The plastic raw materials of PA66 UL94 VO can meet the working environment of - 40 °C to 105 °C.

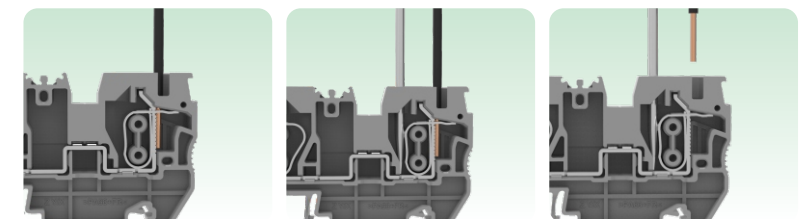



STB2.5


CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 5.2/50.7/1.5mm		


STB2.5-PE


CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate 5.2/50.7/1.5mm		


STB2.5-TW


CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 5.2/62.5/1.5mm		


STB2.5-TW-PE


CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate 5.2/62.5/1.5mm		


STB2.5-QU


CE	800V/24A	0.08-4mm ²
UL	600V/20A	28-12AWG
T/W/End plate 5.2/74.3/1.5mm		


STB2.5-QU-PE


CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate 5.2/74.3/1.5mm		


STB2.5-2L

CE	500V/22A	0.08-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 5.2/71.9/1.5mm		


STB2.5-2L-PV


CE	500V/24A	0.08-4mm ²
UL	300V/20A	28-12AWG
T/W/End plate 5.2/71.9/1.5mm		


STB2.5-2L-PE


CE	—	0.08-4mm ²
UL	—	28-12AWG
T/W/End plate 5.2/71.9/1.5mm		


STB6


CE	1000V/41A	0.2-10mm ²
UL	600V/50A	24-10AWG
T/W/End plate 8.2/69.5/1.5mm		


STB6-PE

CE	—	0.2-10mm ²
UL	—	24-10AWG
T/W/End plate 8.2/69.5/1.5mm		


STB6-TW



CE	1000V/41A	0.2-10mm ²
UL	600V/50A	24-10AWG
T/W/End plate 8.2/91.6/1.5mm		


STB6-TW-PE


CE	—	0.2-10mm ²
UL	—	24-10AWG
T/W/End plate 8.2/91.6/1.5mm		


DC-Steel Screw Terminal Blocks

- The steel cage is used to clamp the wire, and the connection is stable and reliable
- Double channel bridge position, easy to realize potential distribution
- Pluggable bridges and rich accessory systems perfectly solve the application needs of the user end
- Large area identification space, clear wiring

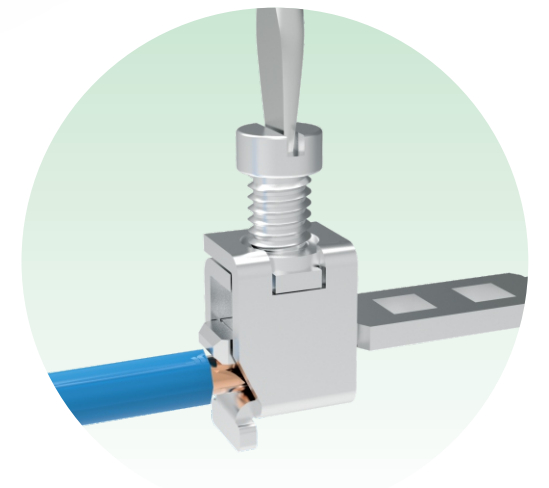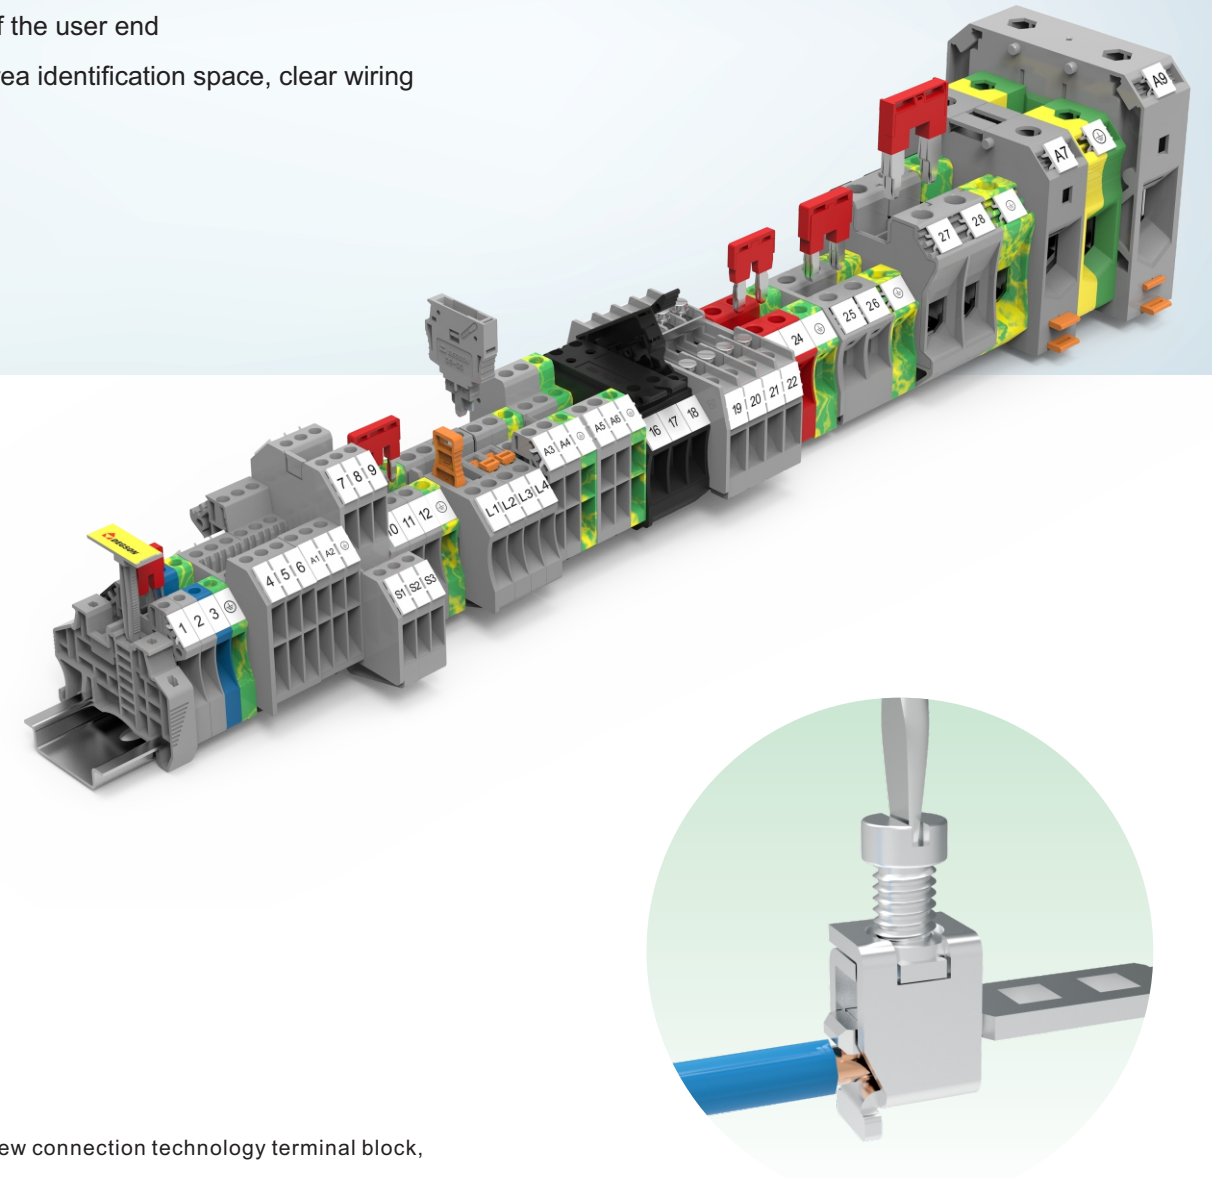


DC steel screw connection technology terminal block, use steel screw and steel cage to clamp wire, good torque and shock resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring the connection is reliable and safe. PA66 material plastic parts can meet the working environment of -40°C to 105°C, and all DC series of din rail products are in line with UL94 V0 flame retardant grade. Compact structure design for superior product performance.

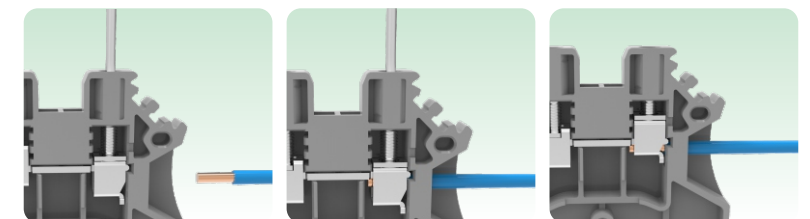




DC2.5

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		




DC2.5-PE

CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		


DC2.5-12A(H)
(Cross & Slotted screw)

CE	800V/24A	0.2-4mm ²
UL	600V/25A	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		



DC2.5-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.2-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/42.3/1.5mm		



DC2.5-TW

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		



DC2.5-TW-PE

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		



DC2.5-TW-02A(H)
(Cross & Slotted screw)

CE	1000V/24A	0.2-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.1/48.7/1.5mm		



DC2.5-QU

CE	500V/24A	0.2-4mm ²
UL	150V/20A	24-12AWG
T/W/End plate 5.1/54.4/1.5mm		




DC2.5-QU-PE

CE	—	0.2-4mm ²
UL	—	24-12AWG
T/W/End plate 5.1/54.4/1.5mm		




DCKKB2.5

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		




DCKKB2.5-PV

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		




DCKKB2.5-PE


CE	—	0.5-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/76/1.5mm		


DCKKB2.5-02A(H)
(Cross & Slotted screw)


CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		


DCKKB2.5-PV-02A(H)
(Cross & Slotted screw)

CE	500V/24A	0.5-4mm ²
UL	300V/20A	26-12AWG
T/W/End plate 5.1/76/1.5mm		



DCKKB2.5-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	26-12AWG
T/W/End plate 5.1/76/1.5mm		




DC4

CE	1000V/32A	0.2-6mm ²
UL	600V/30A	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		




DC4-PE


CE	—	0.2-6mm ²
UL	—	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		


DC4-12A(H)
(Cross & Slotted screw)

CE	1000V/32A	0.5-4mm ²
UL	600V/30A	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		



DC4-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/42.3/1.5mm		




DC4-TW

CE	500V/32A	0.5-6mm ²
UL	300V/20A	20-12AWG
T/W/End plate 6.1/50.9/1.5mm		




DC4-TW-PE


CE	—	0.5-6mm ²
UL	—	20-12AWG
T/W/End plate 6.1/50.9/1.5mm		


DC4-QU
(Cross & Slotted screw)

CE	500V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/54.4/1.5mm		



DC4-QU-PE
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/54.46/1.5mm		




DCKKB4

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DCKKB4-PV

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DCKKB4-PE

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DCKKB4-01P-11-02A(H)


CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		


DCKKB4-PV-02A(H)
(Cross & Slotted screw)

CE	800V/32A	0.5-4mm ²
UL	300V/30A	22-10AWG
T/W/End plate 6.1/76/1.5mm		



DCKKB4-PE-02A(H)
(Cross & Slotted screw)

CE	—	0.5-4mm ²
UL	—	22-10AWG
T/W/End plate 6.1/76/1.5mm		




DC6

CE	1000V/41A	0.5-6mm ²
UL	600V/50A	22-8AWG
T/W/End plate 8.0/45/1.5mm		




DC6-PE

CE	—	0.5-6mm ²
UL	—	22-8AWG
T/W/End plate 8.0/45/1.5mm		




DC10

CE	1000V/57A	0.5-10mm ²
UL	600V/65A	22-6AWG
T/W/End plate 10/45/1.5mm		




DC10-PE

CE	—	0.5-10mm ²
UL	—	22-6AWG
T/W/End plate 10/45/1.5mm		



DC10-300A(H)
(Cross & Slotted screw)

CE	800V/57A	0.5-10mm ²
UL	600V/30A	20-6AWG
T/W/End plate 10/45/1.5mm		




DC10-TW

CE	1000V/57A	1.5-16mm ²
UL	600V/65A	16-6AWG
T/W/End plate 10.2/58.7/1.5mm		




DC10-TW-PE

CE	—	1.5-16mm ²
UL	—	16-6AWG
T/W/End plate 10/58.7/1.5mm		




DCKKB10

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		




DCKKB10-PV

CE	500V/57A	0.5-10mm ²
UL	300V/65A	20-6AWG
T/W/End plate 10/83.9/1.5mm		



DCKKB10-PE

CE	—	0.5-10mm ²
UL	—	20-6AWG
T/W/End plate 10/83.9/1.5mm		




DC16

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate 12/49/1.5mm		




DC16-PE

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate 12/49/1.5mm		



DC35

CE	1000V/125A	1.5-50mm ²
UL	600V/150A	14-1/0AWG
T/W/End plate 16/55.4/-mm		



DC35-PE

CE	—	1.5-50mm ²
UL	—	14-1/0AWG
T/W/End plate 16/55.4/-mm		



DC50

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45/-mm		



DC50-PE


CE	—	16-50mm ²
UL	—	6-1/0AWG</

DC4-HE-LD24	DC4-HE-LD60	DC4-HE-LD250	DC4-MT	DC4-TG
CE 24V/6.3A 0.5-6mm ²	CE 60V/6.3A 0.5-6mm ²	CE 250V/6.3A 0.5-6mm ²	CE 500V/20A 0.5-6mm ²	CE 500V/20A 0.5-6mm ²
UL — 20-10AWG	UL — 20-10AWG	UL — 20-10AWG	UL 600V/16A 26-10AWG	UL 600V/16A 26-10AWG
T/W/End plate 8/58/1.5mm	T/W/End plate 8/58/1.5mm	T/W/End plate 8/58/1.5mm	T/W/End plate 6.1/56.8/1.5mm	T/W/End plate 6.1/56.8/1.5mm
DCTK 6-20A(H)	DCTK6 N	DC2.5-CU	DC2.5-PE-CU	DC4-CU
CE 630V/41A 0.5-6mm ²	CE 630V/41A 0.5-6mm ²	CE 800V/24A 0.2-4mm ²	CE — 0.2-4mm ²	CE 1000V/32A 0.5-4mm ²
UL 300V/45A 22-8AWG	UL 300V/45A 22-8AWG	UL 600V/25A 26-12AWG	UL — 26-12AWG	UL 600V/30A 22-10AWG
T/W/End plate 8/69/1.5mm	T/W/End plate 8/69/1.5mm	T/W/End plate 5.1/42.3/1.5mm	T/W/End plate 5.1/42.3/1.5mm	T/W/End plate 6.1/42.3/1.5mm
DC4-CU-PE	DC6-CU	DC6-PE-CU	DC16-CU-200A(H)	DC16-PE-CU-200A(H)
CE — 0.5-4mm ²	CE 1000V/41A 0.5-6mm ²	CE — 0.5-6mm ²	CE 1000V/76A 1.5-25mm ²	CE — 1.5-25mm ²
UL — 22-10AWG	UL 600V/50A 22-8AWG	UL — 22-8AWG	UL 600V/100A 14-3AWG	UL — 14-3AWG
T/W/End plate 6.1/42.3/1.5mm	T/W/End plate 8/44.95/1.5mm	T/W/End plate 8/44.95/1.5mm	T/W/End plate 12/49/1.5mm	T/W/End plate 12/49/1.5mm
DFAXX5.2	DFAXX6.2	DFAXX8.2	DFAXX10.2	DFAXX12.2
POLE : 2-10P,20P	POLE : 2-10P	POLE : 2-10P	POLE : 2-10P	POLE : 2-3P


DFA35	EBCXX-8
POLE : 2-3P	EBCXX-8 → DC4-HE Series
	XX: NO. OF POLE
	2,3,10POLES

PC-Copper Screw Terminal Blocks

- Screw connection technology is adopted, with excellent connection airtightness
- All copper alloy material, low contact resistance
- The wiring is very flexible and can realize multi wire connection
- Large area identification space, clear wiring

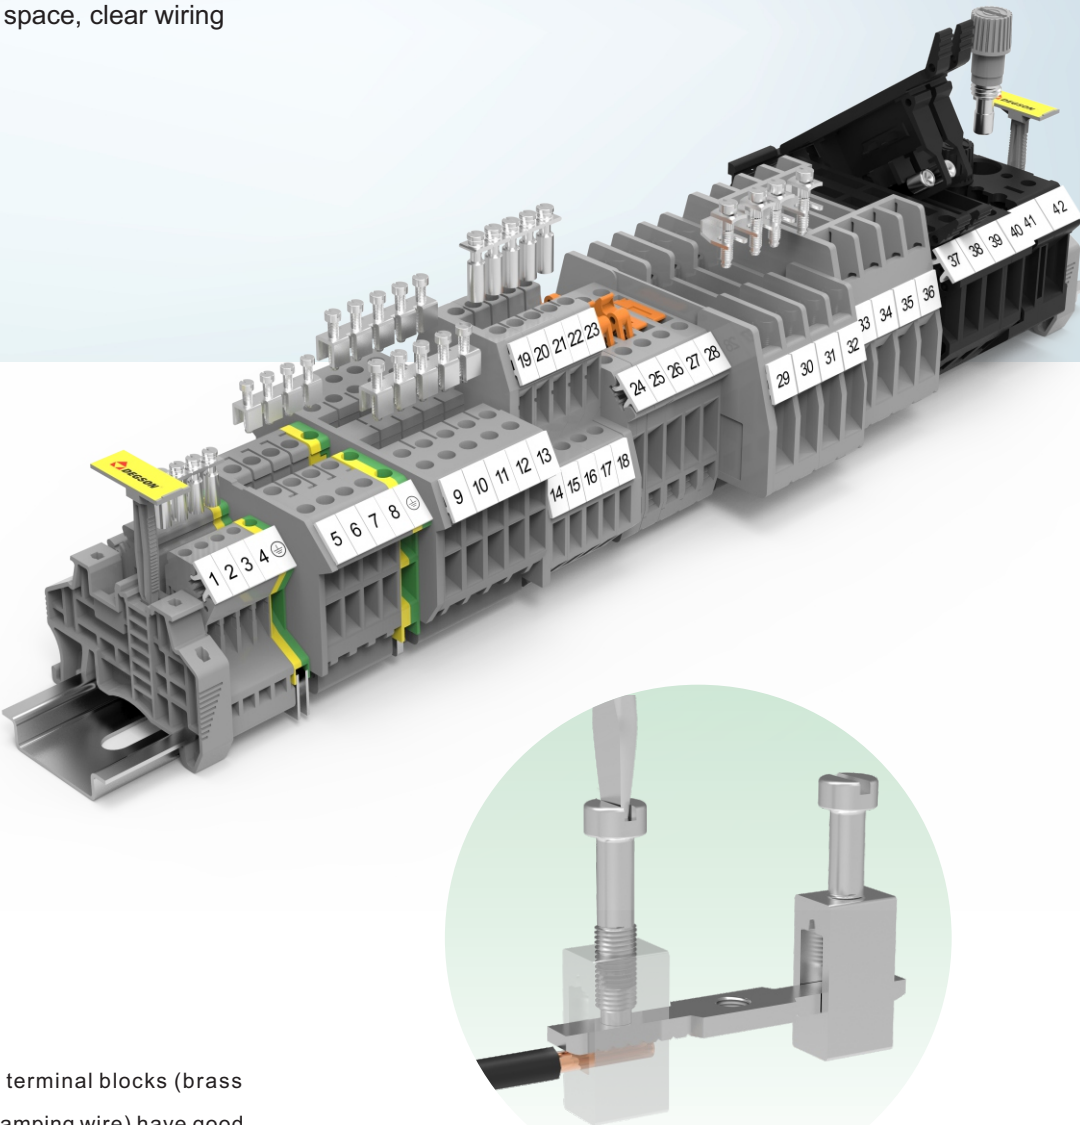


PC brass screw connection terminal blocks (brass screw and brass block with clamping wire) have good corrosion resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40 °C to 105°C, and all PC series of din rail products are in line with UL94 V0 flame retardant grade. Traditional screw terminal blocks: full product line provide different solutions for various industries.

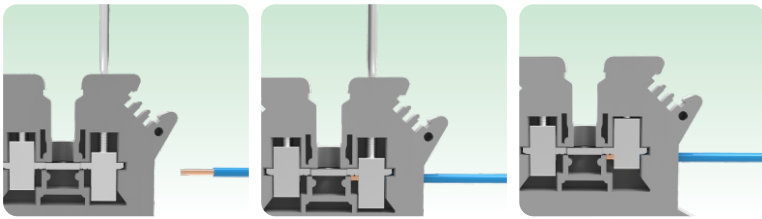




PC1.5

CE	500V/17.5A	0.2-4mm ²
UL	600V/10A	26-16AWG
T/W/End plate 4.2/42.5/1.5mm		




PC2.5

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		




PC2.5-PE

CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/42.5/1.6mm		




PC2.5B

CE	800V/24A	0.2-2.5mm ²
UL	600V/20A	24-12AWG
T/W/End plate 6.2/42.5/1.5mm		




PC2.5-TW

CE	400V/24A	0.2-2.5mm ²
UL	300V/20A	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		




PC2.5-TW-PE

CE	—	0.2-2.5mm ²
UL	—	24-14AWG
T/W/End plate 5.2/50.1/1.5mm		




PCDK2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		




PCDK2.5-PE

CE	—	0.2-2.5mm ²
UL	—	24-12AWG
T/W/End plate 5.2/63.5/1.5mm		



PCKK2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		




PCKK2.5-PV

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	24-12AWG
T/W/End plate 5.2/56/2.5mm		




PC4

CE	800V/32A	0.2-4mm ²
UL	600V/30A	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		




PC4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/42.5/1.6mm		




PC4-TW

CE	500V/32A	0.2-4mm ²
UL	300V/30A	24-12AWG
T/W/End plate 6.2/50.1/2mm		




PC4-TW-PE

CE	—	0.2-4mm ²
UL	—	24-12AWG
T/W/End plate 6.2/50.1/2mm		



PCDK4

CE	630V/32A	0.2-4mm ²
UL	300V/30A	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		




PCDK4-PE

CE	—	0.2-4mm ²
UL	—	24-10AWG
T/W/End plate 6.2/63.5/1.5mm		



PCKK4

CE	500V/32A	0.2-4mm ²
UL	300V/30A	26-10AWG
T/W/End plate 6.2/56/2.5mm		



PCKK4-PE

CE	—	0.2-4mm ²
UL	—	26-10AWG
T/W/End plate 6.2/56/2.5mm		



PC6

CE	800V/41A	0.2-6mm ²
UL	600V/50A	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		



PC6-PE

CE	—	0.2-6mm ²
UL	—	24-8AWG
T/W/End plate 8.2/42.5/1.6mm		




PC10

CE	800V/57A	0.2-10mm ²
UL	600V/65A	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		



PC10-PE

CE	—	0.2-10mm ²
UL	—	20-6AWG
T/W/End plate 10.2/42.5/1.6mm		




PC16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		




PCIK16

CE	800V/76A	0.2-16mm ²
UL	600V/85A	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		




PC16-PE

CE	—	0.2-16mm ²
UL	—	12-4AWG
T/W/End plate 12.2/42.5/1.5mm		




PC35

CE	1000V/125A	0.2-35mm ²
UL	600V/150A	18-1/0AWG
T/W/End plate 15.2/50mm		




PCIK35

CE	800V/125A	0.2-35mm ²
UL	600V/85A	12-2AWG
T/W/End plate 15.2/55mm		




PC35-PE

CE	—	0.2-35mm ²
UL	—	18-1/0AWG
T/W/End plate 15.2/50mm		



PC50

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45mm		



PC50-PE

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45mm		




PC50-01A(H) (Allen screws)

CE	1000V/150A	16-50mm ²
UL	600V/125A	6-1/0AWG
T/W/End plate 20/70.45mm		



PC50-PE-01A(H) (Allen screws)

CE	—	16-50mm ²
UL	—	6-1/0AWG
T/W/End plate 20/70.45mm		




PC95

CE	1000V/232A	25-95mm ²
UL	600V/230A	2-4/0AWG
T/W/End plate 25/83mm		




PC95-PE

CE	—	25-95mm ²
UL	—	2-4/0AWG
T/W/End plate 25/83mm		



PCMB2.5

CE	500V/24A	0.2-2.5mm ²
UL	300V/20A	28-12AWG
T/W/End plate 5.2/28/1.0mm		



PCMB4

CE	500V/32A	0.2-4mm ²
UL	300V/30A	26-10AWG
T/W/End plate 6.2/28/1.0mm		



PC4-HE

CE	800V/6.3A	0.2-4mm ²
UL	600V/6.3A	26-10AWG
T/W/End plate 8.2/72.89mm		



PC10-DR

CE	800V/10A	0.5-10mm ²
UL	600V/10A	24-6AWG
T/W/End plate 12/57.8mm		



PCMT2.5

CE	500V/16A	0.2-2.5mm ²
UL	300V/10A	24-14AWG
T/W/End plate 5.2/46.25/1.0mm		



PCMT4

CE	800V/16A	0.2-4mm ²
UL	600V/15A	24-12AWG
T/W/End plate 6.2/51mm		




PCTK6

CE	400V/41A	0.5-6mm ²
UL	300V/40A	26-10AWG
T/W/End plate 8.2/72/2.0mm		





PCTK6-BEN

CE	500V/41A	0.5-6mm ²
UL	300V/40A	26-10AWG
T/W/End plate 8.2/61/2.2mm		

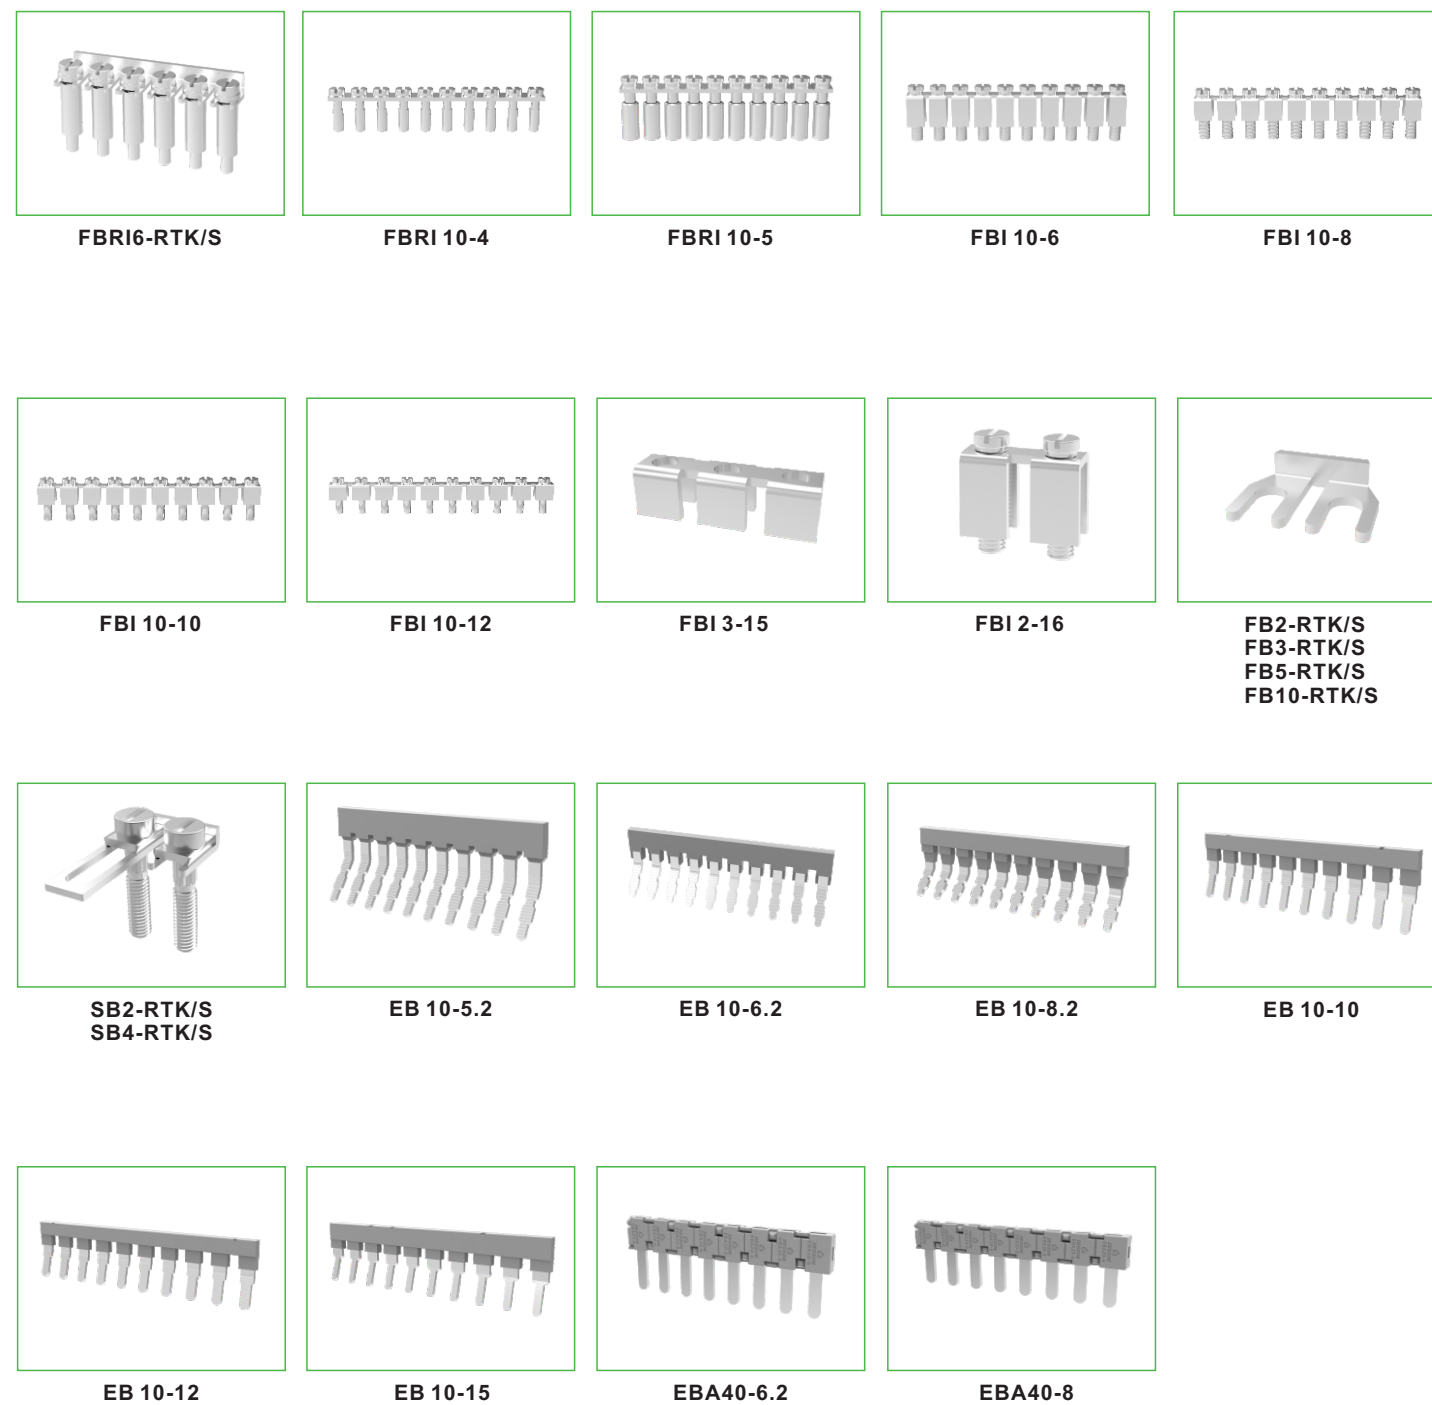



DHV High-voltage Screw Terminal Blocks

- Adopt screw self-locking technology, with excellent anti loosening performance.
- Rated voltage up to kilovolts, especially suitable for medium and high voltage applications in the power industry.
- Copper alloy material, low resistivity, excellent electrical conductivity.
- Double-channel bridge wells, with a 2-20 bit bridge, can flexibly distribute potential.
- Large area identification at 45 °, marking areas easy to identify.

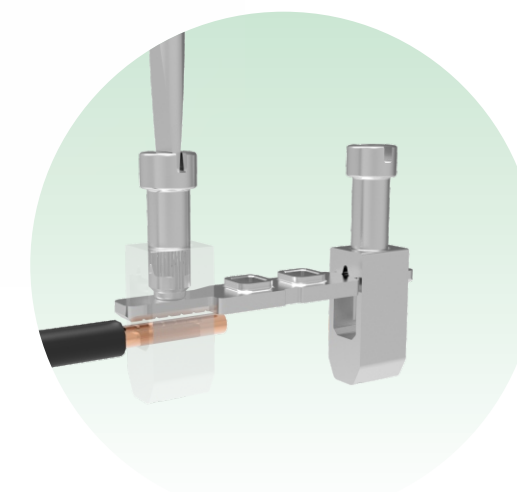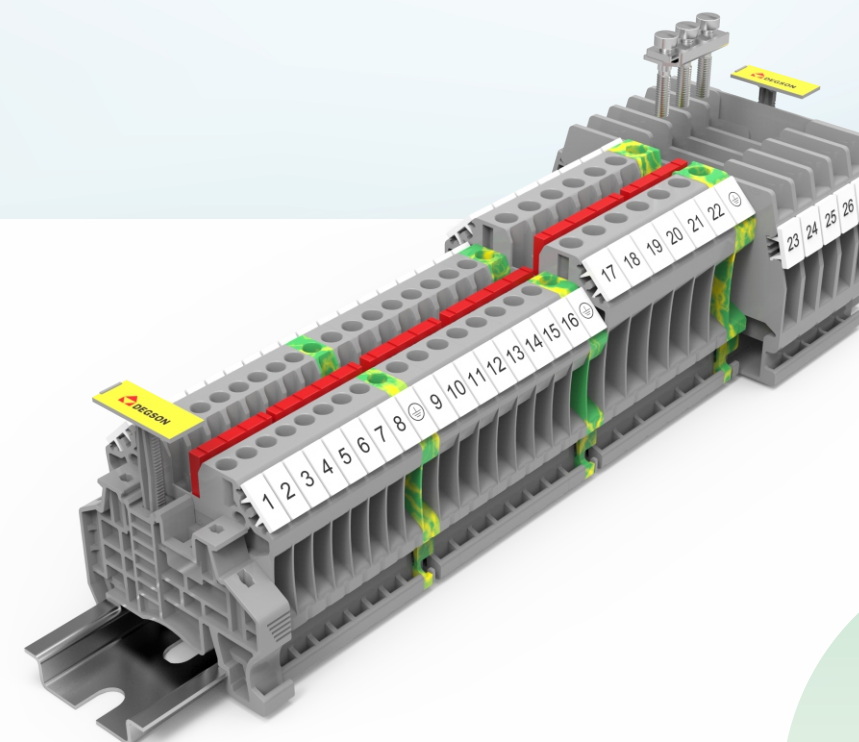


DHV high-voltage screw terminal blocks, using screw self-locking technology, have excellent wiring anti loosening performance. The copper screw and copper clamp body cooperate with each other to ensure the air tightness of long-term connections. High precision copper alloy conductive body minimizes temperature rise, ensuring reliable and safe connection. The plastic raw materials of PA66 can meet the working environment of - 40 °C to 105 °C, and all PC series products meet the UL94 V0 flame retardant grade. The rated voltage of the through type terminals is up to kilovolts, Especially suitable for medium and high voltage applications in the power industry.

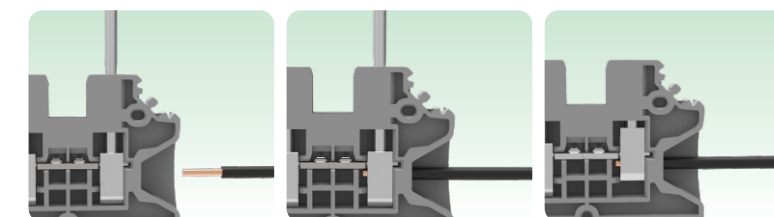




DHV2.5

CE	1000V/24A	0.14-4mm ²
UL	600V/20A	26-12AWG
T/W/End plate 5.2/47.5/1.5mm		




DHV2.5-PE

CE	—	0.14-4mm ²
UL	—	26-12AWG
T/W/End plate 5.2/47.5/1.5mm		




DHV4

CE	1000V/32A	0.14-6mm ²
UL	600V/30A	26-10AWG
T/W/End plate 6.2/47.5/1.5mm		




DHV4-PE

CE	—	0.14-6mm ²
UL	—	26-10AWG
T/W/End plate 6.2/47.5/1.5mm		




DHV6

CE	1000V/41A	0.2-10mm ²
UL	600V/50A	24-8AWG
T/W/End plate 8.2/47.5/1.5mm		



DHV6-PE

CE	—	0.12-10mm ²
UL	—	24-8AWG
T/W/End plate 8.2/47.5/1.5mm		




DHV16

CE	1000V/76A	1.5-25mm ²
UL	600V/100A	14-3AWG
T/W/End plate 12/49/1.5mm		




DHV16-PE

CE	—	1.5-25mm ²
UL	—	14-3AWG
T/W/End plate 12/49/1.5mm		




DHV4-2L-MT

CE	500V/30A	0.14-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		




DHV4-2L-TG

CE	500V/30A	0.14-6mm ²
UL	300V/20A	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		




DHV4-2L-HE

CE	500V/6.3A	0.14-6mm ²
UL	300V/6.3A	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		




DHV4-2L-HE-LD24

CE	24V/6.3A	0.14-6mm ²
UL	—	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		



DHV4-2L-HE-LD60


CE	60V/6.3A	0.14-6mm ²
UL	—	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		



DHV4-2L-HE-LD250


CE	250V/6.3A	0.14-6mm ²
UL	—	26-10AWG
T/W/End plate 6.2/100.5/1.5mm		


BS Bolt Connection Terminal Blocks

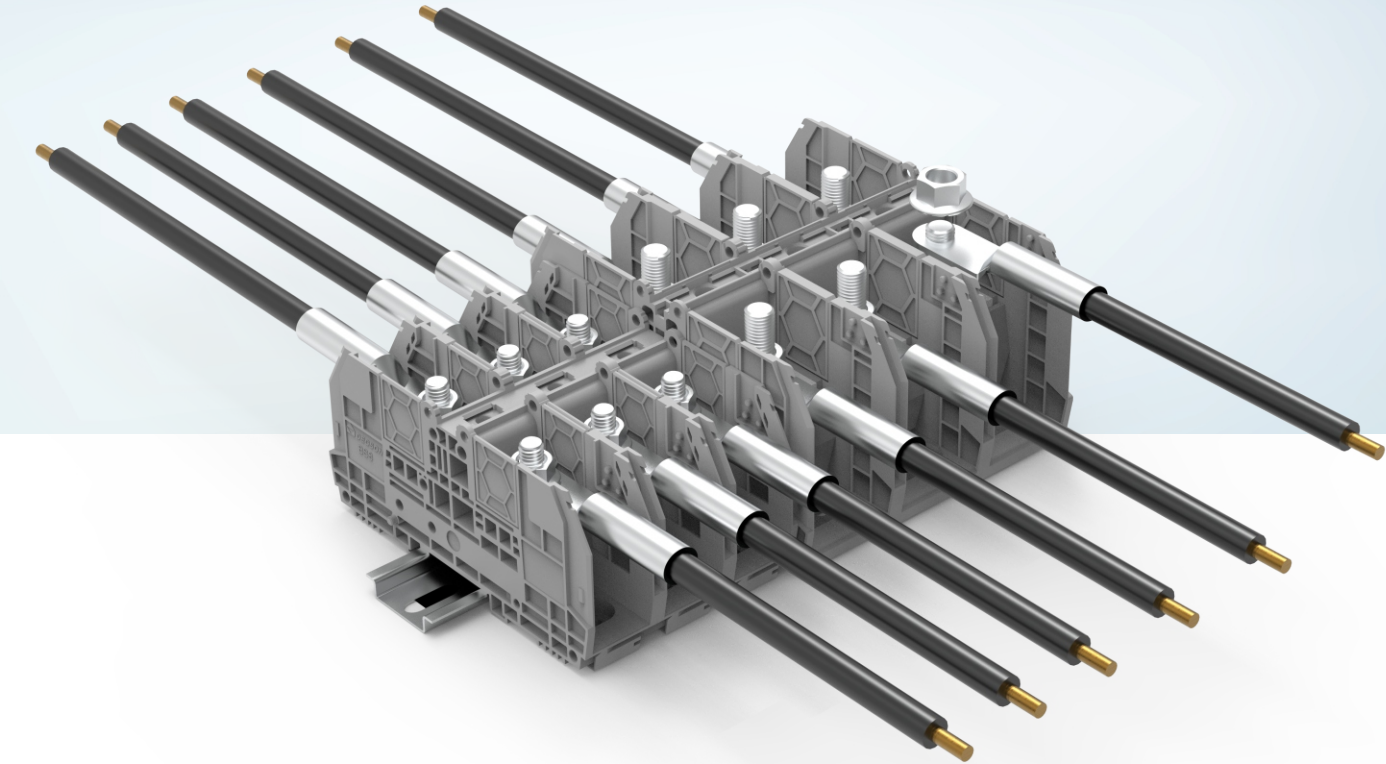

- BS Bolt connection terminal blocks, with bolt connection technology, secure connection.
- Multiple cable ends can be connected with a single screw, which can be used for power feed.
- Closed structure design at both ends, with protective cover, safe and anti-touch.
- Compatible with the marking system to clearly identify the working area.
- Equipped with test hole in the middle, easy to test the circuit.


HOW TO ORDER BS SERIES

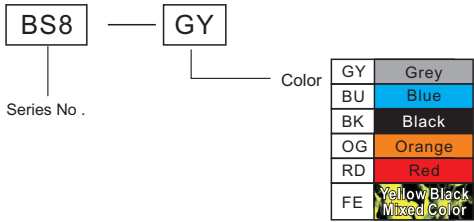

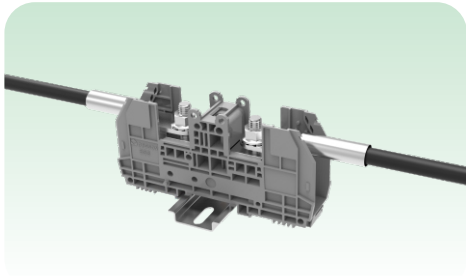


Bolt connection

- BS Series products include BS8, BS10 bolt connection terminal blocks, can connect wires with diameters from 2.5mm² to 150mm².

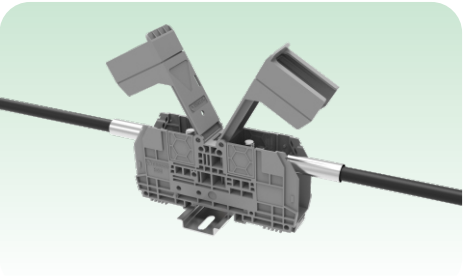


Removable cover

- Closed structure design at both ends, with protective cover, safe and anti-touch.

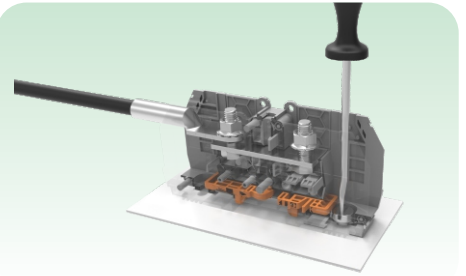


Flexible installation

- Variety installation methods, available for panel & Rail mounted.




BS6

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate	27/155/-mm	




BS6 N

CE	1000V/125A	2.5-35mm ²
UL	600V/115A	16-12AWG
T/W/End plate	27/107/-mm	




BS8

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate	29/184/-mm	




BS8 N

CE	1000V/192A	2.5-70mm ²
UL	600V/175A	16-2/0AWG
T/W/End plate	29/136/-mm	



BS10

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate	41/235/-mm	



BS10 N

CE	1000V/309A	6-150mm ²
UL	600V/310A	10-350AWG
T/W/End plate	41/144/-mm	



Marking System

Degson marking system, providing a complete solution for industrial site identification case. Our thermal transfer printers and laser printers provide customers with Terminal blocks marker, Cable marker, Device marker Printing Service.



Model	PTT
Order No	99020000073

Thermal Transfer Printer

- Support plate printing, marking the terminals.
- Thermal transfer printing technology, quickly realize batch printing.



Model	SLP
Order No	99020000099

Laser Printer

- Powerful and convenient to operate
- Class 1 laser, safety protection

The image displays several different keyboard layouts and models, each associated with a specific table:

- ZB3.5**: A compact keyboard with 10 keys labeled 1-10.
- ZB4**: A compact keyboard with 10 keys labeled A-J.
- ZB5**: A compact keyboard with 10 keys labeled 1-10.
- ZB6**: A compact keyboard with 10 keys labeled A-J.
- ZB8**: A compact keyboard with 10 keys labeled 1-10.
- ZB10**: A compact keyboard with 10 keys labeled A-J.
- ZK5**: A compact keyboard with 10 keys labeled 1-10.
- ZK6**: A compact keyboard with 10 keys labeled A-J.
- ZT12**: A compact keyboard with 10 keys labeled 1-10.
- WB4**: A compact keyboard with 10 keys labeled 1-10.
- WB5**: A compact keyboard with 10 keys labeled A-J.
- DEK4**: A compact keyboard with 10 keys labeled 1-10.
- DEK5**: A compact keyboard with 10 keys labeled A-J.
- DEK6**: A compact keyboard with 10 keys labeled 1-10.
- ZW5**: A compact keyboard with 10 keys labeled 1-10.

Model	Order No
ZB3.5	92118900094
ZB4	92118900109
ZB5	92118900129
ZB6	92118900430
ZB8	92118900578
ZB10	92118900024









Model	Order No
ZK5	92118901170
ZK6	92118901207

Model	Order No
ZT12	92118901290

Model	Order No
WB4	92118900841
WB5	92118900002

Model	Order No
DEK4	92118900750
DEK5	92118900753
DEK6	92118900791

Model	Order No
ZW5	92118900703

																										
<table><tr><th>E-Series Ferrule</th></tr><tr><td>See catalog for details</td></tr></table>	E-Series Ferrule	See catalog for details	<table><tr><th>TE-Series Ferrule</th></tr><tr><td>See catalog for details</td></tr></table>	TE-Series Ferrule	See catalog for details	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-PC-1100A(H)</td><td>11060000074</td></tr></table>	Model	Order No	E-PC-1100A(H)	11060000074	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-PC-1100A(H)</td><td>11060000666</td></tr></table>	Model	Order No	E-PC-1100A(H)	11060000666	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-PC</td><td>11060000073</td></tr></table>	Model	Order No	E-PC	11060000073						
E-Series Ferrule																										
See catalog for details																										
TE-Series Ferrule																										
See catalog for details																										
Model	Order No																									
E-PC-1100A(H)	11060000074																									
Model	Order No																									
E-PC-1100A(H)	11060000666																									
Model	Order No																									
E-PC	11060000073																									
																										
<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-WS</td><td>11060000127</td></tr></table>	Model	Order No	E-WS	11060000127	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-WS N</td><td>11060000669</td></tr></table>	Model	Order No	E-WS N	11060000669	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>E-WS-5</td><td>11060000422</td></tr></table>	Model	Order No	E-WS-5	11060000422	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>DLS-CU3/10</td><td>92118900917</td></tr></table>	Model	Order No	DLS-CU3/10	92118900917	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>AB/SS</td><td>/</td></tr></table>	Model	Order No	AB/SS	/		
Model	Order No																									
E-WS	11060000127																									
Model	Order No																									
E-WS N	11060000669																									
Model	Order No																									
E-WS-5	11060000422																									
Model	Order No																									
DLS-CU3/10	92118900917																									
Model	Order No																									
AB/SS	/																									
																										
<table><tr><th>Model</th><th>Order No</th></tr><tr><td>AB-SKC</td><td>11060000737</td></tr></table>	Model	Order No	AB-SKC	11060000737	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>SKC8</td><td>11060000746</td></tr><tr><td>SKC14</td><td>11060000747</td></tr></table>	Model	Order No	SKC8	11060000746	SKC14	11060000747	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>ATP-DS</td><td>11041000387</td></tr></table>	Model	Order No	ATP-DS	11041000387	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>ATP-PC N</td><td>94200019534</td></tr></table>	Model	Order No	ATP-PC N	94200019534	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>AP3-T</td><td>11060000843</td></tr></table>	Model	Order No	AP3-T	11060000843
Model	Order No																									
AB-SKC	11060000737																									
Model	Order No																									
SKC8	11060000746																									
SKC14	11060000747																									
Model	Order No																									
ATP-DS	11041000387																									
Model	Order No																									
ATP-PC N	94200019534																									
Model	Order No																									
AP3-T	11060000843																									
																										
<table><tr><th>Model</th><th>Order No</th></tr><tr><td>AP3-T-KS</td><td>11060000860</td></tr></table>	Model	Order No	AP3-T-KS	11060000860	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>AP3-COVER-1000</td><td>11060000887</td></tr></table>	Model	Order No	AP3-COVER-1000	11060000887	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>NS35/7.5-CAP</td><td>11060000470</td></tr></table>	Model	Order No	NS35/7.5-CAP	11060000470	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>NS35/15-CAP</td><td>11060000471</td></tr></table>	Model	Order No	NS35/15-CAP	11060000471	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNICUT-TOP</td><td>99030000004</td></tr></table>	Model	Order No	UNICUT-TOP	99030000004		
Model	Order No																									
AP3-T-KS	11060000860																									
Model	Order No																									
AP3-COVER-1000	11060000887																									
Model	Order No																									
NS35/7.5-CAP	11060000470																									
Model	Order No																									
NS35/15-CAP	11060000471																									
Model	Order No																									
UNICUT-TOP	99030000004																									
																										
<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNIWSP</td><td>99030000007</td></tr></table>	Model	Order No	UNIWSP	99030000007	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNIKNF</td><td>99030000012</td></tr></table>	Model	Order No	UNIKNF	99030000012	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNIWCP</td><td>99030000010</td></tr></table>	Model	Order No	UNIWCP	99030000010	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNIWCUT</td><td>99030000005</td></tr></table>	Model	Order No	UNIWCUT	99030000005	<table><tr><th>Model</th><th>Order No</th></tr><tr><td>UNICDS</td><td>99030000011</td></tr></table>	Model	Order No	UNICDS	99030000011		
Model	Order No																									
UNIWSP	99030000007																									
Model	Order No																									
UNIKNF	99030000012																									
Model	Order No																									
UNIWCP	99030000010																									
Model	Order No																									
UNIWCUT	99030000005																									
Model	Order No																									
UNICDS	99030000011																									

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requirements for products and regards it as the responsibility.

Thus, we have made the following environment strategic policy:

1. To meet customers' demands and obey the national and local laws and regulations as well as other environmental protection requirements.
2. Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.
3. Fully considering the factors which will influence the environment in the processes of product development, manufacturing, material usage and waste processing, establish management system of waste in order to improve the environment of our company.
4. To increase the employees' consciousness of environmental protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.
5. To make full use of resources and to decrease consumption of material in order to save energy.
6. To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.
7. To strive for making conservation-oriented and environment-friendly products through continuous innovation and developing new materials and technology.

